

T1/E1/CEPT/ISDN-PRI TRANSFORMERS


Features:

- Dual Surface Mount, 1500Vrms, Small Package
- Dual SMT package contains both transmit and receive transformers
- Models matched to leading transceiver ICs
- Operating temperature 0°C to 70°C
- Contact YuTai for Farther Requirements


Electrical Specifications @ 25°C

Part Number	Turns-Ratio (Pri:Sec ±5%)	OCL (mH Min)	Cw/w (pf Max)	Li (uH Max)	DCR Pri (Ω Max)	Primary Pin
YL26-1061S	1CT:2CT & 1CT:2CT	1.20 & 1.20	30 & 30	0.6 & 0.6	0.7 & 0.7	16-14; 6-8

Schematics



Mechanical

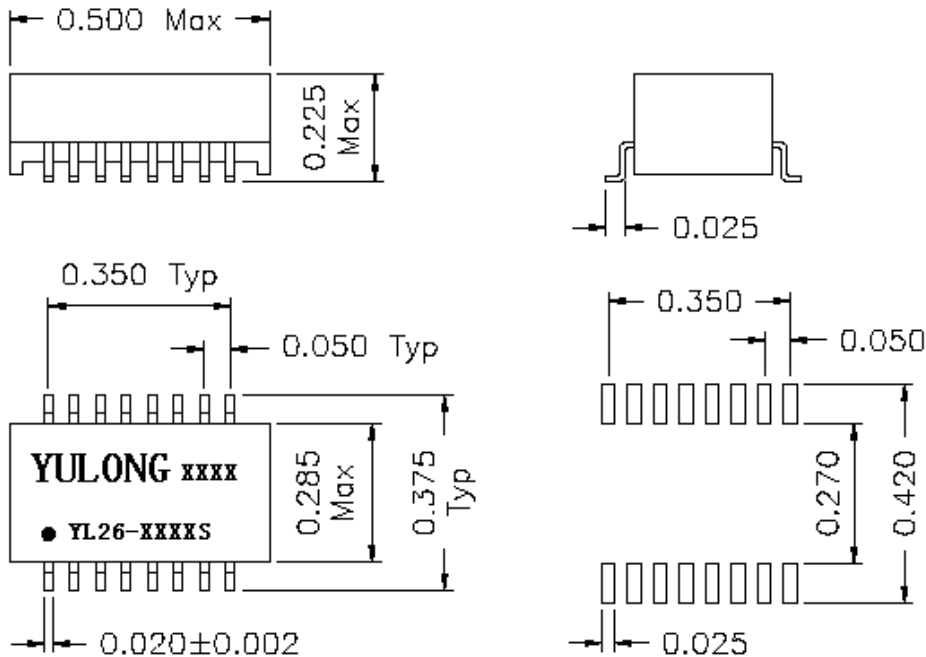

NOTE: Dimensions: inches unless otherwise specified all tolerances are ±0.010